









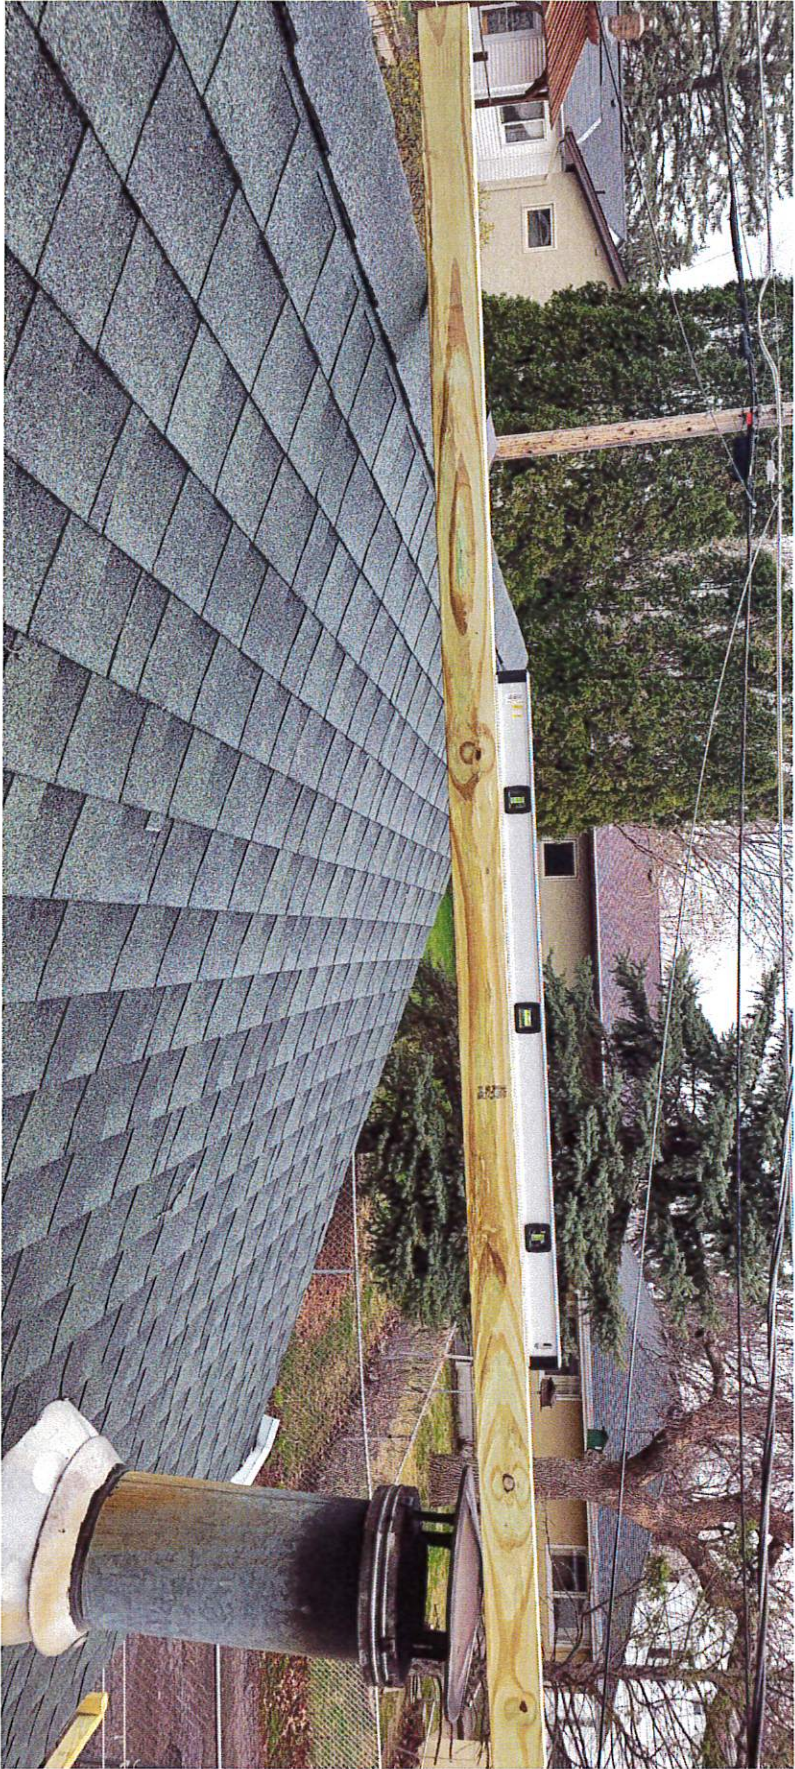

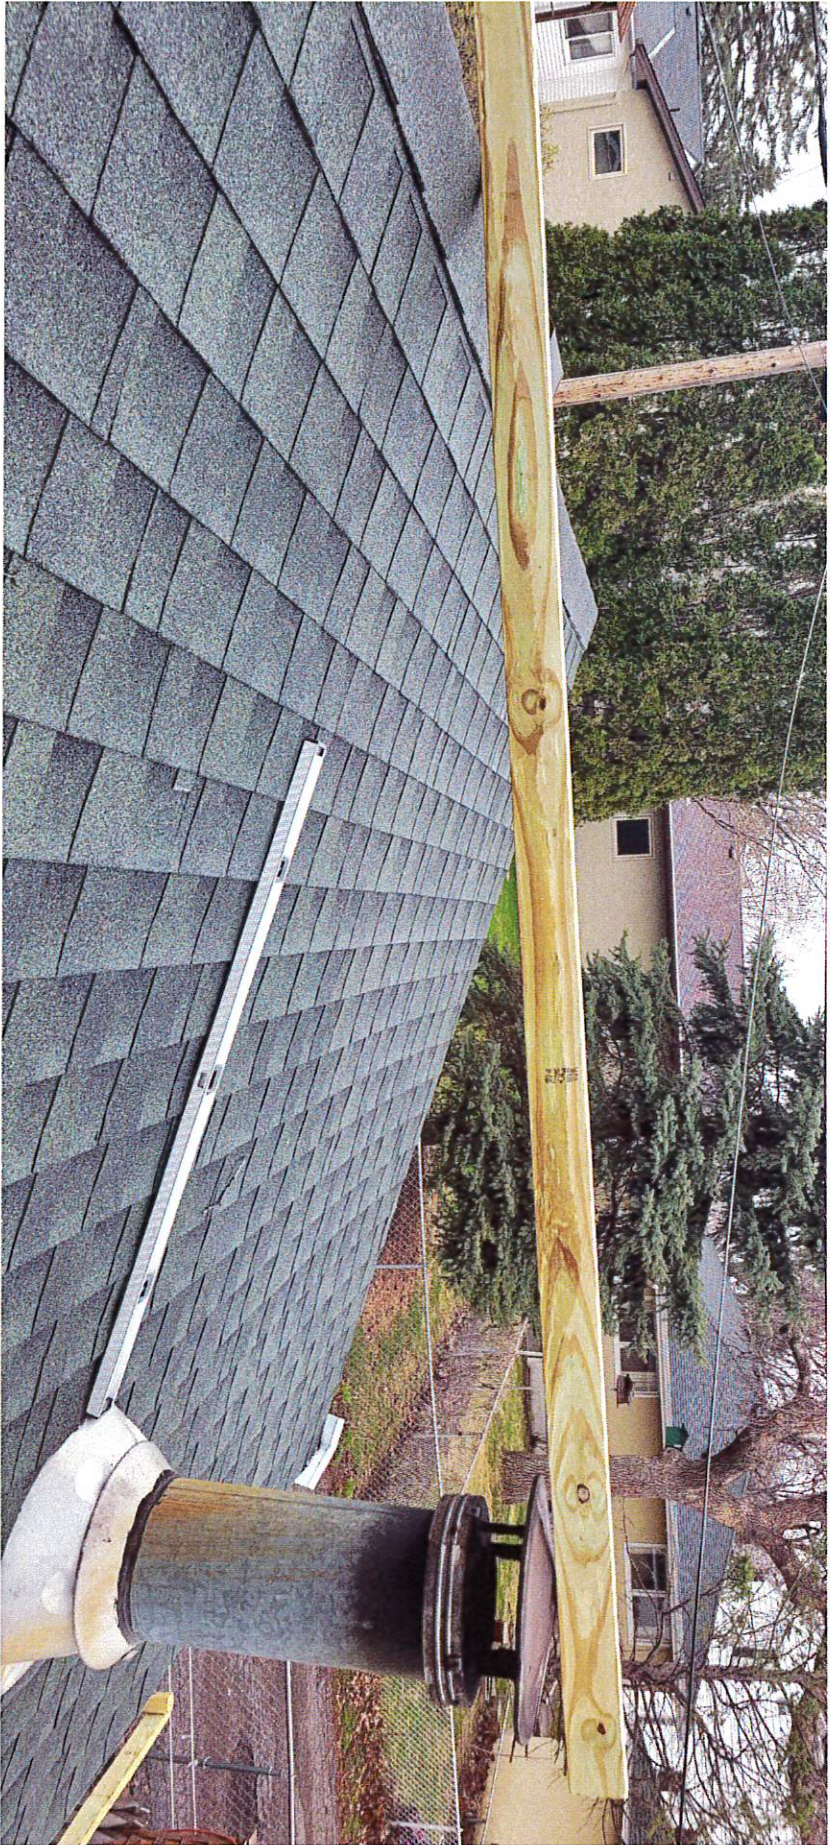





UNITED STATES STOVE CO.
271 INDUSTRIAL PARK ROAD
P.O. BOX 151
SOUTH PITTSBURG, TN 37080

WONDERWOOD
AUTOMATIC WOOD BURNING CIRCULATOR

MODEL NO. 2941
2941B
B2941
B2941B

CONTACT LOCAL BUILDING OR FIRE OFFICIALS ABOUT RESTRICTIONS
AND INSTALLATION INSPECTION IN YOUR AREA

**MINIMUM CLEARANCES
TO COMBUSTIBLE
MATERIALS (INCHES)**



**SIDEWALL BACKWALL
INSTALLATION**

**MINIMUM CLEARANCES
TO CEILING (INCHES)**




"PREVENT HOUSE FIRES"

INSTALL AND USE ONLY IN ACCORDANCE WITH THE
MANUFACTURER'S INSTALLATION AND OPERATING
INSTRUCTIONS AND YOUR LOCAL BUILDING CODES. USE 8 INCH
DIAMETER BLACK STEEL (40 CALGAGE) W/NO CHIMNEY HEATING
APPLIANCE OR MASONRY RESIDENTIAL TYPE CHIMNEY. (SPECIAL
METHODS ARE REQUIRED WHEN PASSING THROUGH A WALL OR
CEILING. SEE INSTRUCTIONS AND LOCAL BUILDING CODES).
PREFERRED CHIMNEY: UL 100HT LISTED, ALL FUEL, 6" I.D.
INSTALL STOVE A MINIMUM OF 35 INCHES FROM BACKWALL AND
17 INCHES FROM SIDEWALL.
CHIMNEY CONNECTOR: MINIMUM 25 INCHES FROM BACKWALL, 25
INCHES TO SIDEWALL AND 24 INCHES FROM CEILING.

DO NOT CONNECT THIS UNIT TO A CHIMNEY SERVING ANOTHER
APPLIANCE. DO NOT BUILD FIRE IN HEATER WITHOUT GRATE
INSTALLED. OPERATE ONLY WITH DOORS CLOSED. HOT WHILE IN
OPERATION. DO NOT TOUCH HEATER OR CHIMNEY. KEEP CHILDREN
AND OTHER COMBUSTIBLE MATERIALS A
CONSIDERABLE DISTANCE AWAY FROM THE HEATER. DO NOT
OCCUPY SPACE UNDER HEATER.

OPTIONAL: BLOWER, US STOVE MODEL, C838
TESTED TO LISTED BY **UL** (Underwriters Laboratories Inc.)
EXEMPT PER **UL** (Underwriters Laboratories Inc.)
METHOD 28A
SERIAL NUMBER: _____
DATE: _____

**FLOOR PROTECTOR
MINIMUM SIZE
(INCHES)**



FLOOR PROTECTOR
SHALL BE MADE OF A
NON-FLAMMABLE MATERIAL
WITH A MINIMUM
THERMAL CONDUCTIVITY OF
0.05 BTU IN/HR FT² F
KINDLEABLE FLOOR
PROTECTOR SHALL BE
PROTECTOR EXTENDING 18"
IN FRONT OF HEATER AND
DOOR. PROTECTOR SHALL
BE 14" WIDE AND 18" DEEP
DIRECTLY UNDER HEATER AND 2" TO
CHIMNEY CONNECTOR.

CAUTION

FOR USE WITH 150 LB WOOD PELLET ONLY. DO NOT OVERFILL. HEATER & CHIMNEY CONNECTOR
CLOGGING YOU ARE CAUTIONED TO CLEAN HEATER & CHIMNEY CONNECTOR
CHIMNEY TWICE MONTHLY AND CLEAN HEATER & CHIMNEY CONNECTOR
OR SMOKE MAY BUILD UP RAPIDLY. KEEP FEED AND ASH DOORS CLOSED DURING OPERATION.
DO NOT REMOVE OR COVER THIS LABEL.

1504541